## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 23 December 2004 (23.12.2004)

**PCT** 

# (10) International Publication Number WO 2004/111588 A1

(51) International Patent Classification<sup>7</sup>: G12B 9/08

G01K 1/14,

(21) International Application Number:

PCT/SE2004/000892

(22) International Filing Date:

8 June 2004 (08.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0301780-3

19 June 2003 (19.06.2003) SE

(71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; Av. Général-Guisan 70, CH-1009 Pully (CH).

(72) Inventors; and


(75) Inventors/Applicants (for US only): NÄSLUND, Lars

[SE/SE]; Skattevägen 12, S-244 65 Furulund (SE). NILSSON, Tommy [SE/SE]; Sommargatan 5, S-233 35 Svedala (SE).

- (74) Agent: AHL, Camilla; AB Tetra Pak, Patent Department, Ruben Rausings gata, S-221 86 Lund (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: SENSOR HOLDER

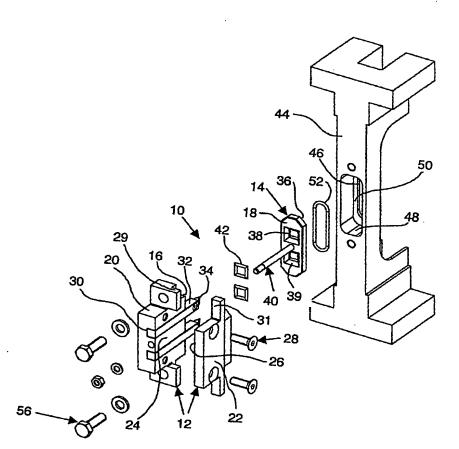

(57) Abstract: TThe present invention refers to a sensor holder (10) for arranging a sensor (32) through the wall and into communication with the inside of a housing (44). It comprises a first and a second component (12,14), the first component (12) being adapted to hold said sensor (32),the second component (14) being provided with a first sealing surface (36) and at least one throughgoing opening (38). A portion of the sensor (32) being adapted to extend from the first component (12), through the opening (38) in the second component (14) and into communication with the inside of the housing (44).

WO 2004/111588 A1

### WO 2004/111588 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

#### Published:

with international search report